



Edge™

RANGE INTRODUCTION

Edge™ is a range of wiring devices that combine function and style. The design is smooth, clean and the products are very slim – in fact just 1.5mm. Edge™ is the choice in modern, contemporary or traditional interiors where style and detail are the desired effect.

With Edge™ comes unrivalled safety. Utilising MK's 3-pin operated safety shutter, that prevents misuse and unsafe access to live circuitry, Edge™ offers the user the peace of mind and comfort that they have the safest range of wiring devices available installed in their surroundings.

HOW TO SPECIFY

A metal flatplate flush mounting range of wiring accessories, to be made in the UK. Frontplate to have a maximum 1.5mm profile and subtle 5mm radius rounded corners. Fixing screws to be flathead design, flush fitting & coloured to match the frontplate. Cable connections must be upward facing with easy to identify white markings on a dark background, grouped in a straight line with captive terminal screws for ease of installation. All sockets to have a 3 pin operated shutter safety mechanism and double pole switching, with the contacts designed such that the neutral makes before and breaks after the live pole for improved safety. Switches to be large and concave with a minimum 3mm contact gap with a positive 'click' to denote successful operation.

FEATURES & BENEFITS

SLIM PROFILE FRONTPLATES OF ONLY 1.5MM WITH MATCHING FLAT HEAD SCREWS THROUGHOUT

A clean and practical range of products that complement the finest interiors.

TOTAL SAFETY

3-pin operated "child resistant shutter system", which is designed to inhibit access to the electricity supply, unless all 3 pins of a standard British 13A plug are in position.


COMPREHENSIVE RANGE OF SOCKETS, SWITCHES AND MODULAR ANCILLARY PRODUCTS

Mean that whatever the application, the Edge™ range has a wiring device to suit.

13 STANDARD HIGH QUALITY FINISHES WITH A MADE-TO-ORDER SERVICE

Allows designers the flexibility to provide the finish of their choice.

In addition to the wide choice of standard finishes, a made-to-order service gives designers the ability to match almost any RAL colour required.

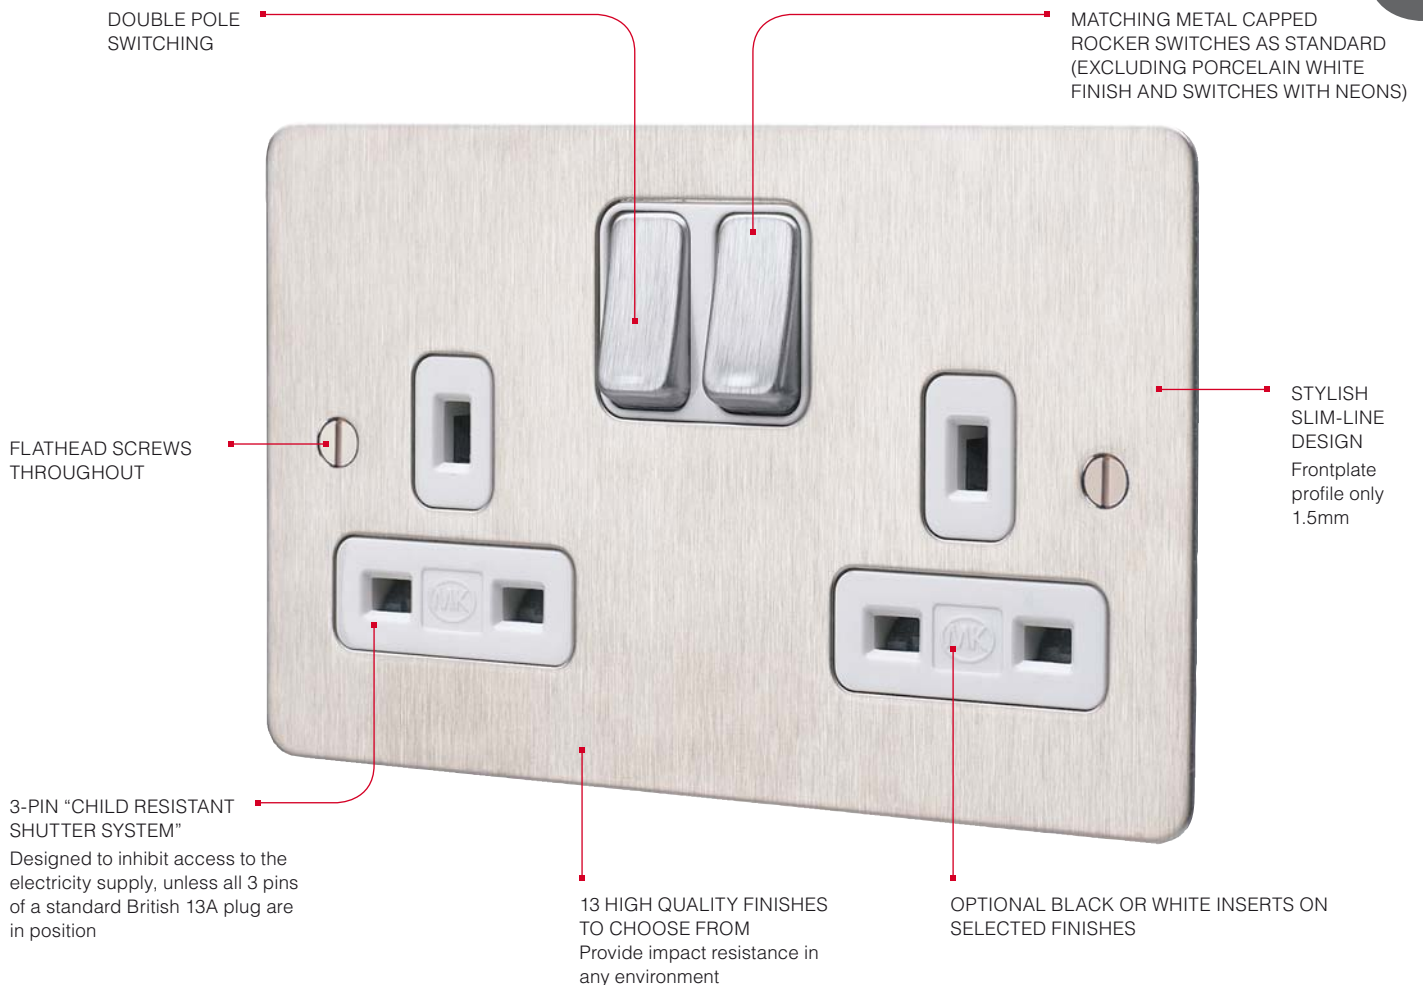

Terminal screws are backed out and captive. Terminals are upwards facing to make installation easier.

Funnel entrance to terminals.

Clear terminal markings for easy identification.

The built-in lock in the Edge™ 13A Key Operated Socket ensures that power cannot be turned on or off without the removeable key, making it ideal for communal areas such as hotel lobbies.

Combination plates provide a neat solution to all power, data, TV and satellite outlet requirements.



Switchsocket Outlets

1 GANG DP
DUAL EARTH
13 AMP

1 GANG DP
WITH NEON
DUAL EARTH
13 AMP

NON STANDARD
1 GANG DP
CLEAN EARTH
13 AMP

2 GANG DP
WITH 2 X USB
CHARGING PORTS
DUAL EARTH
13 AMP

2 GANG DP
DUAL EARTH
13 AMP



FINISHES										
BRUSHED STAINLESS STEEL	K14357BSS*	1	K14657BSS*	1	K14268BSS*	1	K14343BSS*	1	K14347BSS*	1
LACQUERED BRUSHED STEEL	K14357LBS*	1	K14657LBS*	1	K14268LBS*	1	K14343LBS*	1	K14347LBS*	1
BRUSHED CHROME	K14357BRC*	1	K14657BRC*	1	K14268BRC*	1	K14343BRC*	1	K14347BRC*	1
POLISHED CHROME	K14357POC*	1	K14657POC*	1	K14268POC*	1	K14343POC*	1	K14347POC*	1
SATIN GOLD	K14357SAG*	1	K14657SAG*	1	K14268SAG*	1	K14343SAG*	1	K14347SAG*	1
PORCELAIN WHITE	K14357WHIW	1	K14657WHIW	1	K14268WHIW	1	K14343WHIW	1	K14347WHIW	1
LUSTROUS IVORY	K14357LIVW	1	K14657LIVW	1	K14268LIVW	1	K14343LIVW	1	K14347LIVW	1
LUSTROUS BLACK	K14357LBKB	1	K14657LBKB	1	K14268LBKB	1	K14343LBKB	1	K14347LBKB	1
POLISHED BRASS	K14357PBR*	1	K14657PBR*	1	K14268PBR*	1	K14343PBR*	1	K14347PBR*	1
TEXTURED IRON	K14357TIRB	1	K14657TIRB	1	K14268TIRB	1	K14343TIRB	1	K14347TIRB	1
DESERT BRONZE	K14357DBZB	1	K14657DBZB	1	K14268DBZB	1	K14343DBZB	1	K14347DBZB	1
ANTIQUE BRASS	K14357ABSB	1	K14657ABSB	1	K14268ABSB	1	K14343ABSB	1	K14347ABSB	1
TEXTURED COPPER	K14357TCOB	1	K14657TCOB	1	K14268TCOB	1	K14343TCOB	1	K14347TCOB	1

LEAD TIMES
Please contact our Customer
Services Department on
01268 563 404

* Available with the option of either White or Black inserts. Add Suffix 'W' or 'B' to part number when ordering, E.g. KxxxxBSSW. Where there is no asterisk, the final suffix W = White Insert, B = Black Insert, E.g. KxxxxWHIW = Porcelain White finish with White inserts

MOUNTING BOXES
FLUSH 35mm
866ZIC
FLUSH 46mm
877ZIC (for extra wiring space)
DIMENSIONS
86 x 86mm
FIXING CENTRES
60.3mm
BS 1363-2:1995

MOUNTING BOXES
FLUSH 35mm
866ZIC
FLUSH 46mm
877ZIC (for extra wiring space)
DIMENSIONS
86 x 86mm
FIXING CENTRES
60.3mm
BS 1363-2:1995
Neon is only available in white
or black insulated rocker.

MOUNTING BOXES
FLUSH 35mm
866ZIC
FLUSH 46mm
877ZIC (for extra wiring space)
DIMENSIONS
86 x 86mm
FIXING CENTRES
60.3mm
BS 1363-2:1995 (where
relevant)
These products are provided
with facilities for 'clean earth'
connections and are suitable
for non-standard plugs with 'T'
shaped earth pins.

USB charging sockets, each
capable of supporting 2A
charge (total of 2A)
Pattress available for use
where existing back box is too
shallow, see page 34

MOUNTING BOXES
FLUSH 35mm
886ZIC
FLUSH 47mm
878ZIC (for extra wiring space)
DIMENSIONS
86 x 146mm
FIXING CENTRES
120.6mm
BS 5733:2010

MOUNTING BOXES
FLUSH 35mm
886ZIC
FLUSH 47mm
878ZIC (for extra wiring
space)
DIMENSIONS
86 x 146mm
FIXING CENTRES
120.6mm
BS 1363-2:1995

Dual Earth: Fitted with two earth terminals to provide a double earth facility for use when installations require a high integrity protective connection as specified within BS 7671:2008.



Technical Hotline
+44 (0)1268 563720

Edge™

WIRING DEVICES
DECORATIVE

2 GANG DP
CLEAN EARTH
13 AMP

2 GANG DP
WITH NEON
DUAL EARTH
13 AMP

NON STANDARD
2 GANG DP
CLEAN EARTH
13 AMP

1 GANG DP
ROUND PIN
15 AMP

1 GANG DP
5 AMP



K14345BSS*	1	K14647BSS*	1	K14246BSS*	1	K14383BSS*	1	K14382BSS*	1
K14345LBS*	1	K14647LBS*	1	K14246LBS*	1	K14383LBS*	1	K14382LBS*	1
K14345BRC*	1	K14647BRC*	1	K14246BRC*	1	K14383BRC*	1	K14382BRC*	1
K14345POC*	1	K14647POC*	1	K14246POC*	1	K14383POC*	1	K14382POC*	1
K14345SAG*	1	K14647SAG*	1	K14246SAG*	1	K14383SAG*	1	K14382SAG*	1
K14345WHIW	1	K14647WHIW	1	K14246WHIW	1	K14383WHIW	1	K14382WHIW	1
K14345LIVW	1	K14647LIVW	1	K14246LIVW	1	K14383LIVW	1	K14382LIVW	1
K14345LBKB	1	K14647LBKB	1	K14246LBKB	1	K14383LBKB	1	K14382LBKB	1
K14345PBR*	1	K14647PBR*	1	K14246PBR*	1	K14383PBR*	1	K14382PBR*	1
K14345TIRB	1	K14647TIRB	1	K14246TIRB	1	K14383TIRB	1	K14382TIRB	1
K14345DBZB	1	K14647DBZB	1	K14246DBZB	1	K14383DBZB	1	K14382DBZB	1
K14345ABSB	1	K14647ABSB	1	K14246ABSB	1	K14383ABSB	1	K14382ABSB	1
K14345TCOB	1	K14647TCOB	1	K14246TCOB	1	K14383TCOB	1	K14382TCOB	1

* Available with the option of either White or Black inserts. Add Suffix 'W' or 'B' to part number when ordering, E.g. KxxxxBSSW.
Where there is no asterisk, the final suffix W = White Insert, B = Black Insert, E.g. KxxxxWHIW = Porcelain White finish with White inserts

MOUNTING BOXES
FLUSH 35mm
886ZIC
FLUSH 47mm
878ZIC (for extra wiring space)
DIMENSIONS
86 x 146mm
FIXING CENTRES
120.6mm
BS 1363-2:1995

MOUNTING BOXES
FLUSH 35mm
886ZIC
FLUSH 47mm
878ZIC (for extra wiring space)
DIMENSIONS
86 x 146mm
FIXING CENTRES
120.6mm
BS 1363-2:1995
Neon is only available in white or black insulated rocker.

Dual Earth: Fitted with two earth terminals to provide a double earth facility for use when installations require a high integrity protective connection as specified within BS 7671: 2008.

MOUNTING BOXES
FLUSH 35mm
886ZIC
FLUSH 47mm
878ZIC (for extra wiring space)
DIMENSIONS
86 x 146mm
FIXING CENTRES
120.6mm
BS 1363-2:1995 (where relevant)
These products are provided with facilities for 'clean earth' connections, and are suitable for non-standard plugs with T shaped earth pins. Refer to non-standard plugs page 240.

MOUNTING BOXES
FLUSH 35mm
886ZIC
FLUSH 46mm
877ZIC (for extra wiring space)
DIMENSIONS
86 x 86mm
FIXING CENTRES
60.3mm
BS 546:1950

MOUNTING BOXES
FLUSH 35mm
886ZIC
FLUSH 46mm
877ZIC (for extra wiring space)
DIMENSIONS
86 x 86mm
FIXING CENTRES
60.3mm
BS 546:1950


* Available with the option of either White or Black inserts. Add Suffix 'W' or 'B' to part number when ordering, E.g. KxxxxBSSW.
Where there is no asterisk, the final suffix W = White Insert, B = Black Insert, E.g. KxxxxWHIW = Porcelain White finish with White inserts

Multimedia Plates

4 GANG DP DUAL EARTH
SWITCHSOCKET,
EURO 4 MODULE
100 X 50MM
13 AMP

2 GANG DP DUAL EARTH
SWITCHSOCKET,
EURO 6 MODULE
50 X 50MM (X3)
13 AMP

4 GANG DP DUAL EARTH
SWITCHSOCKET,
EURO 8 MODULE
100 X 50MM (X2)
13 AMP



FINISHES				
BRUSHED STAINLESS STEEL	K14200BSS*	1	K14205BSS*	1
LACQUERED BRUSHED STEEL	K14200LBS*	1	K14205LBS*	1
BRUSHED CHROME	K14200BRC*	1	K14205BRC*	1
POLISHED CHROME	K14200POC*	1	K14205POC*	1
SATIN GOLD	K14200SAG*	1	K14205SAG*	1
PORCELAIN WHITE	K14200WHIW	1	K14205WHIW	1
LUSTROUS IVORY	K14200LIVW	1	K14205LIVW	1
LUSTROUS BLACK	K14200LBKB	1	K14205LBKB	1
POLISHED BRASS	K14200PBR*	1	K14205PBR*	1
TEXTURED IRON	K14200TIRB	1	K14205TIRB	1
DESERT BRONZE	K14200DBZB	1	K14205DBZB	1
ANTIQUÉ BRASS	K14200ABSB	1	K14205ABSB	1
TEXTURED COPPER	K14200TCOB	1	K14205TCOB	1

LEAD TIMES
Please contact our Customer
Services Department on
01268 563 404

* Available with the option of either White or Black inserts. Add Suffix 'W' or 'B' to part number when ordering, E.g. KxxxxBSSW.
Where there is no asterix, the final suffix W = White Insert, B = Black Insert, E.g. KxxxxWHIW = Porcelain White finish with White inserts

MOUNTING BOXES
FLUSH 35mm
K14201
FLUSH 47mm
K14202
DIMENSIONS
86 x 442.8mm
BS 1363-2:1995

MOUNTING BOXES
FLUSH 35mm
K14206
FLUSH 47mm
K14207
DIMENSIONS
86 x 407.9mm
BS 1363-2:1995

MOUNTING BOXES
FLUSH 35mm
K14101
FLUSH 47mm
K14102
DIMENSIONS
173 x 293.6mm
BS 1363-2:1995

Dual Earth: Fitted with two earth terminals to provide a double earth facility for use when installations require a high integrity protective connection as specified within BS 7671:2008.

Mains operated products and extra low voltage modules must not be installed within the same frontplate aperture.
Refer to BS 7671:2008 for details.



Technical Hotline
+44 (0)1268 563720

Edge™

WIRING DEVICES
DECORATIVE

Multimedia Plates

2 GANG DP DUAL EARTH
SWITCHSOCKET,
EURO 2 MODULE
50 X 50MM (RIGHT SIDE)
13 AMP

2 GANG DP DUAL EARTH
SWITCHSOCKET,
EURO 2 MODULE
50 X 50MM (LEFT SIDE)
13 AMP

2 GANG DP DUAL EARTH
SWITCHSOCKET,
EURO 4 MODULE
50 X 50MM (X2)
13 AMP

EURO 8 MODULE
100 X 50MM (X2)

EURO 12 MODULE
150 X 50MM (X2)



K14216BSS*	1	K14217BSS*	1	K14208BSS*	1	K14209BSS*	1	K14210BSS*	1
K14216LBS*	1	K14217LBS*	1	K14208LBS*	1	K14209LBS*	1	K14210LBS*	1
K14216BRC*	1	K14217BRC*	1	K14208BRC*	1	K14209BRC*	1	K14210BRC*	1
K14216POC*	1	K14217POC*	1	K14208POC*	1	K14209POC*	1	K14210POC*	1
K14216SAG*	1	K14217SAG*	1	K14208SAG*	1	K14209SAG*	1	K14210SAG*	1
K14216WHIW	1	K14217WHIW	1	K14208WHIW	1	K14209WHIW	1	K14210WHIW	1
K14216LIVW	1	K14217LIVW	1	K14208LIVW	1	K14209LIVW	1	K14210LIVW	1
K14216LBKB	1	K14217LBKB	1	K14208LBKB	1	K14209LBKB	1	K14210LBKB	1
K14216PBR*	1	K14217PBR*	1	K14208PBR*	1	K14209PBR*	1	K14210PBR*	1
K14216TIRB	1	K14217TIRB	1	K14208TIRB	1	K14209TIRB	1	K14210TIRB	1
K14216DBZB	1	K14217DBZB	1	K14208DBZB	1	K14209DBZB	1	K14210DBZB	1
K14216ABSB	1	K14217ABSB	1	K14208ABSB	1	K14209ABSB	1	K14210ABSB	1
K14216TCOB	1	K14217TCOB	1	K14208TCOB	1	K14209TCOB	1	K14210TCOB	1

* Available with the option of either White or Black inserts. Add Suffix 'W' or 'B' to part number when ordering, E.g. KxxxxBSSW.
Where there is no asterisk, the final suffix W = White Insert, B = Black Insert, E.g. KxxxxWHIW = Porcelain White finish with White inserts

MOUNTING BOXES
867ZIC
DIMENSIONS
233.3 x 86mm
BS 1363-2:1995

MOUNTING BOXES
867ZIC
DIMENSIONS
233.3 x 86mm
BS 1363-2:1995

MOUNTING BOXES
868ZIC
DIMENSIONS
320.6 x 86mm
BS 1363-2:1995

MOUNTING BOXES
858ZIC
DIMENSIONS
146.4 x 173.3mm
BS 5733:2010

MOUNTING BOXES
869ZIC
DIMENSIONS
206.3 x 173.3mm
BS 5733:2010

Dual Earth: Fitted with two earth terminals to provide a double earth facility for use when installations require a high integrity protective connection as specified within BS 7671:2008.

Mains operated products and extra low voltage modules must not be installed within the same frontplate aperture.
Refer to BS 7671:2008 for details.


Socket Outlets

1 GANG
DUAL EARTH
13 AMP

2 GANG
DUAL EARTH
13 AMP

1 GANG
2 AMP

1 GANG
5 AMP



FINISHES								
BRUSHED STAINLESS STEEL	K14780BSS*	1	K14781BSS*	1	K14380BSS*	1	K14381BSS*	1
LACQUERED BRUSHED STEEL	K14780LBS*	1	K14781LBS*	1	K14380LBS*	1	K14381LBS*	1
BRUSHED CHROME	K14780BRC*	1	K14781BRC*	1	K14380BRC*	1	K14381BRC*	1
POLISHED CHROME	K14780POC*	1	K14781POC*	1	K14380POC*	1	K14381POC*	1
SATIN GOLD	K14780SAG*	1	K14781SAG*	1	K14380SAG*	1	K14381SAG*	1
PORCELAIN WHITE	K14780WHIW	1	K14781WHIW	1	K14380WHIW	1	K14381WHIW	1
LUSTROUS IVORY	K14780LIVW	1	K14781LIVW	1	K14380LIVW	1	K14381LIVW	1
LUSTROUS BLACK	K14780LBKB	1	K14781LBKB	1	K14380LBKB	1	K14381LBKB	1
POLISHED BRASS	K14780PBR*	1	K14781PBR*	1	K14380PBR*	1	K14381PBR*	1
TEXTURED IRON	K14780TIRB	1	K14781TIRB	1	K14380TIRB	1	K14381TIRB	1
DESERT BRONZE	K14780DBZB	1	K14781DBZB	1	K14380DBZB	1	K14381DBZB	1
ANTIQUE BRASS	K14780ABSB	1	K14781ABSB	1	K14380ABSB	1	K14381ABSB	1
TEXTURED COPPER	K14780TCOB	1	K14781TCOB	1	K14380TCOB	1	K14381TCOB	1

LEAD TIMES
Please contact our Customer
Services Department on
01268 563 404

* Available with the option of either White or Black inserts. Add Suffix 'W' or 'B' to part number when ordering, E.g. KxxxxBSSW.
Where there is no asterisk, the final suffix W = White Insert, B = Black Insert, E.g. KxxxxWHIW = Porcelain White finish with White inserts

MOUNTING BOXES
FLUSH 35mm
866ZIC
FLUSH 46mm
877ZIC (for extra wiring space)
DIMENSIONS
86 x 86mm
FIXING CENTRES
60.3mm
BS 1363-2:1995

MOUNTING BOXES
FLUSH 35mm
886ZIC
FLUSH 47mm
878ZIC (for extra wiring space)
DIMENSIONS
86 x 146mm
FIXING CENTRES
120.6mm
BS 1363-2:1995

MOUNTING BOXES
FLUSH 25mm
861ZIC
FLUSH 35mm
866ZIC (for extra wiring space)
DIMENSIONS
86 x 86mm
FIXING CENTRES
60.3mm
Earth pin linear operated shutter
BS 546:1950

MOUNTING BOXES
FLUSH 35mm
866ZIC
FLUSH 46mm
877ZIC (for extra wiring space)
DIMENSIONS
86 x 86mm
FIXING CENTRES
60.3mm
BS 546:1950

Dual Earth: Fitted with two earth terminals to provide a double earth facility for use when installations require a high integrity protective connection as specified within BS 7671:2008.



Technical Hotline
+44 (0)1268 563720

Edge™

WIRING DEVICES
DECORATIVE

Floor Mounted Euro Frames

1 GANG
EURO 2 MODULE
50 X 50MM

2 GANG
EURO 4 MODULE
100 X 50MM



K14790BSS	1	K14791BSS	1
K14790LBS	1	K14791LBS	1
K14790BRC	1	K14791BRC	1
K14790POC	1	K14791POC	1
K14790SAG	1	K14791SAG	1
K14790WHI	1	K14791WHI	1
K14790LIV	1	K14791LIV	1
K14790LBK	1	K14791LBK	1
K14790PBR	1	K14791PBR	1
K14790TIR	1	K14791TIR	1
K14790DBZ	1	K14791DBZ	1
K14790ABS	1	K14791ABS	1
K14790TCO	1	K14791TCO	1



MOUNTING BOXES FLUSH 1 GANG

866Z/C

DIMENSIONS

102 x 86mm

FIXING CENTRES

60.3mm

Boxes must have a minimum depth of 35mm.

BS 5733:2010

MOUNTING BOXES FLUSH 2 GANG

886Z/C

DIMENSIONS

102 x 146mm

FIXING CENTRES

120.6mm

Boxes must have a minimum depth of 35mm.

BS 5733:2010

Key Operated Socket Outlet and Switch

1 GANG DP
DUAL EARTH
13 AMP


1 GANG
DP SWITCH
20 AMP

1 GANG DP
FIRE ALARM
ISOLATOR SWITCH
20 AMP

Shaver/Toothbrush Supply Units

DUAL VOLTAGE
OUTPUT 115/230V
INPUT 220/240V
50/60HZ

120/130 V INPUT
(NON UK)



FINISHES										
BRUSHED STAINLESS STEEL	K14355BSS*	1	K14378BSS	1	K14379BSS	1	K14709BSS*	1	K14710BSS*	1
LACQUERED BRUSHED STEEL	K14355LBS*	1					K14709LBS*	1	K14710LBS*	1
BRUSHED CHROME	K14355BRC*	1					K14709BRC*	1	K14710BRC*	1
POLISHED CHROME	K14355POC*	1					K14709POC*	1	K14710POC*	1
SATIN GOLD	K14355SAG*	1					K14709SAG*	1	K14710SAG*	1
PORCELAIN WHITE	K14355WHIW	1					K14709WHIW	1	K14710WHIW	1
LUSTROUS IVORY	K14355LIVW	1					K14709LIVW	1	K14710LIVW	1
LUSTROUS BLACK	K14355LBKB	1					K14709LBKB	1	K14710LBKB	1
POLISHED BRASS	K14355PBR*	1					K14709PBR*	1	K14710PBR*	1
TEXTURED IRON	K14355TIRB	1					K14709TIRB	1	K14710TIRB	1
DESERT BRONZE	K14355DBZB	1					K14709DBZB	1	K14710DBZB	1
ANTIQUE BRASS	K14355ABSB	1					K14709ABSB	1	K14710ABSB	1
TEXTURED COPPER	K14355TCOB	1					K14709TCOB	1	K14710TCOB	1

LEAD TIMES
Please contact our Customer
Services Department on
01268 563 404

* Available with the option of either White or Black inserts. Add Suffix 'W' or 'B' to part number when ordering, E.g. KxxxxBSSW.
Where there is no asterisk, the final suffix W = White Insert, B = Black Insert, E.g. KxxxxWHIW = Porcelain White finish with White inserts.

MOUNTING BOXES
FLUSH 47mm
878ZIC
DIMENSIONS
86 x 146mm
FIXING CENTRES
120.6mm
BS 1363-2:1995

MOUNTING BOXES
FLUSH 46mm
877ZIC
DIMENSIONS
86 x 86mm
FIXING CENTRES
60.3mm
BS EN 60669-1:1999

MOUNTING BOX
FLUSH 46mm
877ZIC
DIMENSIONS
86 x 86mm
FIXING CENTRES
60.3mm
BS 60669-2-4: 2005
The isolator has primarily been
introduced for use in alarm
systems that must comply with
BS 5839-1

MOUNTING BOXES
FLUSH
878ZIC
This design incorporates a double wound isolating transformer
rated 20VA at 230 or 115 volts and meets BS EN 61558-2-5:1998,
making it safe for use in bathrooms.
Insertion of a shaver/toothbrush plug automatically switches on
output by energising the primary side of the isolating transformer –
removal automatically switches it off. The transformer is protected
against overload by an automatic solid state overload device with
automatic resetting.
DIMENSIONS
146 x 86mm
FIXING CENTRES
120.6mm
BS EN 61558-2-5:1998

Dual Earth: Fitted with
two earth terminals to
provide a double earth
facility for use when
installations require a
high integrity protective
connection as specified
within BS 7671:2008.



Technical Hotline
+44 (0)1268 563720

Edge™

WIRING DEVICES
DECORATIVE

Connection Units Switched

DP
13 AMP



DP
WITH NEON**
13 AMP



DP
WITH FLEX OUTLET
13 AMP



DP
WITH NEON**
& FLEX OUTLET
13 AMP



K14941BSS*	1	K14961BSS*	1	K14931BSS*	1	K14971BSS*	1
K14941LBS*	1	K14961LBS*	1	K14931LBS*	1	K14971LBS*	1
K14941BRC*	1	K14961BRC*	1	K14931BRC*	1	K14971BRC*	1
K14941POC*	1	K14961POC*	1	K14931POC*	1	K14971POC*	1
K14941SAG*	1	K14961SAG*	1	K14931SAG*	1	K14971SAG*	1
K14941WHIW	1	K14961WHIW	1	K14931WHIW	1	K14971WHIW	1
K14941LIVW	1	K14961LIVW	1	K14931LIVW	1	K14971LIVW	1
K14941LBKB	1	K14961LBKB	1	K14931LBKB	1	K14971LBKB	1
K14941PBR*	1	K14961PBR*	1	K14931PBR*	1	K14971PBR*	1
K14941TIRB	1	K14961TIRB	1	K14931TIRB	1	K14971TIRB	1
K14941DBZB	1	K14961DBZB	1	K14931DBZB	1	K14971DBZB	1
K14941ABSB	1	K14961ABSB	1	K14931ABSB	1	K14971ABSB	1
K14941TCOB	1	K14961TCOB	1	K14931TCOB	1	K14971TCOB	1

* Available with the option of either White or Black inserts. Add Suffix 'W' or 'B' to part number when ordering, E.g. KxxxxBSSW.
Where there is no asterisk, the final suffix W = White Insert, B = Black Insert, E.g. KxxxxWHIW = Porcelain White finish with White inserts

MOUNTING BOXES
FLUSH 35mm
866ZIC
FLUSH 46mm
877ZIC (for extra wiring space)
DIMENSIONS
86 x 86mm
FIXING CENTRES
60.3mm
BS 1363-4:1995

MOUNTING BOXES
FLUSH 35mm
866ZIC
FLUSH 46mm
877ZIC (for extra wiring space)
DIMENSIONS
86 x 86mm
FIXING CENTRES
60.3mm
BS 1363-4:1995
****NOTE**
Neon is only available in white or black insulated rocker.

MOUNTING BOXES
FLUSH 35mm
866ZIC
FLUSH 46mm
877ZIC (for extra wiring space)
DIMENSIONS
86 x 86mm
FIXING CENTRES
60.3mm
BS 1363-4:1995

MOUNTING BOXES
FLUSH 35mm
866ZIC
FLUSH 46mm
877ZIC (for extra wiring space)
DIMENSIONS
86 x 86mm
FIXING CENTRES
60.3mm
BS 1363-4:1995
****NOTE**
Neon is only available in white or black insulated rocker.

Matching metal capped fuse carriers are standard on all Edge™ Connection Units (except WHI and Neon).

Connection Units Unswitched

13 AMP

WITH NEON
13 AMPWITH FLEX OUTLET
13 AMPWITH NEON &
FLEX OUTLET
13 AMP

FINISHES								
BRUSHED STAINLESS STEEL	K14948BSS*	1	K14958BSS*	1	K14989BSS*	1	K14978BSS*	1
LACQUERED BRUSHED STEEL	K14948LBS*	1	K14958LBS*	1	K14989LBS*	1	K14978LBS*	1
BRUSHED CHROME	K14948BRC*	1	K14958BRC*	1	K14989BRC*	1	K14978BRC*	1
POLISHED CHROME	K14948POC*	1	K14958POC*	1	K14989POC*	1	K14978POC*	1
SATIN GOLD	K14948SAG*	1	K14958SAG*	1	K14989SAG*	1	K14978SAG*	1
PORCELAIN WHITE	K14948WHIW	1	K14958WHIW	1	K14989WHIW	1	K14978WHIW	1
LUSTROUS IVORY	K14948LIVW	1	K14958LIVW	1	K14989LIVW	1	K14978LIVW	1
LUSTROUS BLACK	K14948LBKB	1	K14958LBKB	1	K14989LBKB	1	K14978LBKB	1
POLISHED BRASS	K14948PBR*	1	K14958PBR*	1	K14989PBR*	1	K14978PBR*	1
TEXTURED IRON	K14948TIRB	1	K14958TIRB	1	K14989TIRB	1	K14978TIRB	1
DESERT BRONZE	K14948DBZB	1	K14958DBZB	1	K14989DBZB	1	K14978DBZB	1
ANTIQUÉ BRASS	K14948ABSB	1	K14958ABSB	1	K14989ABSB	1	K14978ABSB	1
TEXTURED COPPER	K14948TCOB	1	K14958TCOB	1	K14989TCOB	1	K14978TCOB	1

LEAD TIMES
Please contact our Customer
Services Department on
01268 563 404

* Available with the option of either White or Black inserts. Add Suffix 'W' or 'B' to part number when ordering, E.g. KxxxxBSSW.
Where there is no asterix, the final suffix W = White Insert, B = Black Insert, E.g. KxxxxWHIW = Porcelain White finish with White inserts.

MOUNTING BOXES
FLUSH 35mm
866ZIC
FLUSH 46mm
877ZIC (for extra wiring space)
DIMENSIONS
86 x 86mm
FIXING CENTRES
60.3mm
BS 1363-4:1995

MOUNTING BOXES
FLUSH 35mm
866ZIC
FLUSH 46mm
877ZIC (for extra wiring space)
DIMENSIONS
86 x 86mm
FIXING CENTRES
60.3mm
BS 1363-4:1995

MOUNTING BOXES
FLUSH 35mm
866ZIC
FLUSH 46mm
877ZIC (for extra wiring space)
DIMENSIONS
86 x 86mm
FIXING CENTRES
60.3mm
BS 1363-4:1995

MOUNTING BOXES
FLUSH 35mm
866ZIC
FLUSH 46mm
877ZIC (for extra wiring space)
DIMENSIONS
86 x 86mm
FIXING CENTRES
60.3mm
BS 1363-4:1995

Matching metal capped fuse carriers are standard on all Edge™ Connection Units (except WHI and Neon).



Technical Hotline
+44 (0)1268 563720

Edge™

WIRING DEVICES
DECORATIVE

Switches

1 GANG SP
2 WAY
20 AMP

2 GANG SP
2 WAY
20 AMP

3 GANG SP
2 WAY
10 AMP

1 GANG SP
2 WAY
WITH LARGE ROCKER
20 AMP

2 GANG SP
2 WAY
WITH LARGE
ROCKERS
20 AMP



K14371BSS*	1	K14372BSS*	1	K14373BSS*	1	K13471BSS*	1	K13472BSS*	1
K14371LBS*	1	K14372LBS*	1	K14373LBS*	1	K13471LBS*	1	K13472LBS*	1
K14371BRC*	1	K14372BRC*	1	K14373BRC*	1	K13471BRC*	1	K13472BRC*	1
K14371POC*	1	K14372POC*	1	K14373POC*	1	K13471POC*	1	K13472POC*	1
K14371SAG*	1	K14372SAG*	1	K14373SAG*	1	K13471SAG*	1	K13472SAG*	1
K14371WHIW	1	K14372WHIW	1	K14373WHIW	1	K13471WHIW	1	K13472WHIW	1
K14371LIVW	1	K14372LIVW	1	K14373LIVW	1	K13471LIVW	1	K13472LIVW	1
K14371LBKB	1	K14372LBKB	1	K14373LBKB	1	K13471LBKB	1	K13472LBKB	1
K14371PBR*	1	K14372PBR*	1	K14373PBR*	1	K13471PBR*	1	K13472PBR*	1
K14371TIRB	1	K14372TIRB	1	K14373TIRB	1	K13471TIRB	1	K13472TIRB	1
K14371DBZB	1	K14372DBZB	1	K14373DBZB	1	K13471DBZB	1	K13472DBZB	1
K14371ABSB	1	K14372ABSB	1	K14373ABSB	1	K13471ABSB	1	K13472ABSB	1
K14371TCOB	1	K14372TCOB	1	K14373TCOB	1	K13471TCOB	1	K13472TCOB	1

* Available with the option of either White or Black inserts. Add Suffix 'W' or 'B' to part number when ordering, E.g. KxxxxBSSW.
Where there is no asterisk, the final suffix W = White Insert, B = Black Insert, E.g. KxxxxWHIW = Porcelain White finish with White inserts.

MOUNTING BOXES
FLUSH
861ZIC
DIMENSIONS
86 x 86mm
FIXING CENTRES
60.3mm
BS EN 60669-1:1999

MOUNTING BOXES
FLUSH
861ZIC
DIMENSIONS
86 x 86mm
FIXING CENTRES
60.3mm
BS EN 60669-1:1999

MOUNTING BOXES
FLUSH
861ZIC
DIMENSIONS
86 x 86mm
FIXING CENTRES
60.3mm
BS EN 60669-1:1999

MOUNTING BOXES
FLUSH
861ZIC
DIMENSIONS
86 x 86mm
ROCKER DIMENSIONS
22 x 40mm
FIXING CENTRES
120.6mm
BS 60669-1:1999

MOUNTING BOXES
FLUSH
861ZIC
DIMENSIONS
86 x 86mm
ROCKER DIMENSIONS
22 x 40mm
FIXING CENTRES
120.6mm
BS 60669-1:1999

High Current Switches

1 GANG DP
WITH NEON
32 AMP

1 GANG DP
WITH NEON
50 AMP

Cooker Control Unit


DP SWITCH AND
13 AMP
SWITCHSOCKET
OUTLET WITH NEONS
45 AMP

3 Pole Fan Isolator

10 AMP

Triple Pole & Neutral Switch

32 AMP



FINISHES										
BRUSHED STAINLESS STEEL	K14305BSS*	1	K14336BSS*	1	K14361BSS*	1	K14859BSS*	1	K14114BSS*	1
LACQUERED BRUSHED STEEL	K14305LBS*	1			K14361LBS*	1	K14859LBS*	1	K14114LBS*	1
BRUSHED CHROME	K14305BRC*	1			K14361BRC*	1	K14859BRC*	1	K14114BRC*	1
POLISHED CHROME	K14305POC*	1			K14361POC*	1	K14859POC*	1	K14114POC*	1
SATIN GOLD	K14305SAG*	1			K14361SAG*	1	K14859SAG*	1	K14114SAG*	1
PORCELAIN WHITE	K14305WHIW	1			K14361WHIW	1	K14859WHIW	1	K14114WHIW	1
LUSTROUS IVORY	K14305LIVW	1			K14361LIVW	1	K14859LIVW	1	K14114LIVW	1
LUSTROUS BLACK	K14305LBKB	1			K14361LBKB	1	K14859LBKB	1	K14114LBKB	1
POLISHED BRASS	K14305PBR*	1			K14361PBR*	1	K14859PBR*	1	K14114PBR*	1
TEXTURED IRON	K14305TIRB	1			K14361TIRB	1	K14859TIRB	1	K14114TIRB	1
DESERT BRONZE	K14305DBZB	1			K14361DBZB	1	K14859DBZB	1	K14114DBZB	1
ANTIQUÉ BRASS	K14305ABSB	1			K14361ABSB	1	K14859ABSB	1	K14114ABSB	1
TEXTURED COPPER	K14305TCOB	1			K14361TCOB	1	K14859TCOB	1	K14114TCOB	1

LEAD TIMES
Please contact our Customer
Services Department on
01268 563 404

* Available with the option of either White or Black inserts. Add Suffix 'W' or 'B' to part number when ordering, E.g. KxxxxBSSW.
Where there is no asterisk, the final suffix W = White Insert, B = Black Insert, E.g. KxxxxWHIW = Porcelain White finish with White inserts

MOUNTING BOXES
FLUSH 35mm
866ZIC
877ZIC (for extra wiring space)
DIMENSIONS
86 x 86mm
FIXING CENTRES
60.3mm
BS EN 60669-1:1999

MOUNTING BOXES
FLUSH 47mm
878ZIC
DIMENSIONS
86 x 86mm
FIXING CENTRES
60.3mm
BS EN 60669-1:1999

MOUNTING BOXES
FLUSH 47mm
878ZIC
45A DP Main Switch and 13A
Switchsocket outlet (Up to
10mm² conductor).
Rotary operated shutter.
DIMENSIONS
86 x 146mm
FIXING CENTRES
120.6mm
BS 4177:1992
To allow adequate wiring
space, mounting box must be
installed 6mm to 10mm sub
flush to the wall surface.

MOUNTING BOXES
FLUSH 46mm
877ZIC
DIMENSIONS
86 x 186mm
FIXING CENTRES
60.3mm
BS EN 60947-3:1999
To allow adequate wiring
space, mounting box must be
installed 6mm to 10mm sub
flush to the wall surface.

MOUNTING BOXES:
FLUSH
5268ALM (Mounting box
should be mounted 6 to 10mm
sub-flush to the wall)
DIMENSIONS
203 x 140mm
TERMINAL CAPACITY
16mm² conductors
BS EN 60947-3:1999



Technical Hotline
+44 (0)1268 563720

Edge™

WIRING DEVICES
DECORATIVE

Intelligent Dimmers

2 WAY SINGLE
230V A.C. 50HZ
60W/VA MIN.
500W/400VA MAX.

2 WAY DOUBLE
230V A.C. 50HZ
60W/VA MIN.
450W/360VA MAX.
FOR EACH DIMMER

2 WAY SINGLE
230V A.C. 50HZ
40W/VA MIN.
300W/240VA MAX.

2 WAY DOUBLE
230V A.C. 50HZ
40W/VA MIN.
300W/240VA MAX.
FOR EACH DIMMER



K14301BSS	1	K14302BSS	1	K14521BSS	1	K14522BSS	1
K14301LBS	1	K14302LBS	1	K14521LBS	1	K14522LBS	1
K14301BRC	1	K14302BRC	1	K14521BRC	1	K14522BRC	1
K14301POC	1	K14302POC	1	K14521POC	1	K14522POC	1
K14301SAG	1	K14302SAG	1	K14521SAG	1	K14522SAG	1
K14301WHI	1	K14302WHI	1	K14521WHI	1	K14522WHI	1
K14301LIV	1	K14302LIV	1	K14521LIV	1	K14522LIV	1
K14301LBK	1	K14302LBK	1	K14521LBK	1	K14522LBK	1
K14301PBR	1	K14302PBR	1	K14521PBR	1	K14522PBR	1
K14301TIR	1	K14302TIR	1	K14521TIR	1	K14522TIR	1
K14301DBZ	1	K14302DBZ	1	K14521DBZ	1	K14522DBZ	1
K14301ABS	1	K14302ABS	1	K14521ABS	1	K14522ABS	1
K14301TCO	1	K14302TCO	1	K14521TCO	1	K14522TCO	1

* Available with the option of either White or Black inserts. Add Suffix 'W' or 'B' to part number when ordering, E.g. KxxxxBSSW.
Where there is no asterix, the final suffix W = White Insert, B = Black Insert, E.g. KxxxxWHIW = Porcelain White finish with White inserts

MOUNTING BOXES
FLUSH
866ZIC – 35mm deep min
DIMENSIONS
86 x 86mm
FIXING CENTRES
60.3mm

MOUNTING BOXES
FLUSH
886ZIC – 35mm deep min
DIMENSIONS
86 x 146mm
FIXING CENTRES
120.6mm

MOUNTING BOXES
FLUSH
866ZIC – 35mm deep min
DIMENSIONS
86 x 86mm
FIXING CENTRES
60.3mm

MOUNTING BOXES
FLUSH
866ZIC – 35mm deep min
DIMENSIONS
86 x 86mm
FIXING CENTRES
60.3mm

These dimmers employ the latest micro-controller based circuitry to provide electronic soft-start and overload protection. They are suitable for use with good quality electronic or wire-wound transformers. Can also be used with good quality halogen lamps incorporating GU10 bases. Please check with lamp manufacturer to determine suitability.

NOT SUITABLE FOR FLUORESCENT LOADS.

Conform to latest standards BS EN 60669-2-1.

All intelligent dimmers have a combined push-on/push-off switch and rotary dimmer control, and are suitable for one or two-way switching.

Toggle Switch Frontplates

SUPPLIED WITH GRIDS

1 MODULE

2 MODULE

3 MODULE

4 MODULE



FINISHES	1 MODULE	2 MODULE	3 MODULE	4 MODULE
BRUSHED STAINLESS STEEL	K14431BSS 1	K14432BSS 1	K14433BSS 1	K14434BSS 1
LACQUERED BRUSHED STEEL	K14431LBS 1	K14432LBS 1	K14433LBS 1	K14434LBS 1
BRUSHED CHROME	K14431BRC 1	K14432BRC 1	K14433BRC 1	K14434BRC 1
POLISHED CHROME	K14431POC 1	K14432POC 1	K14433POC 1	K14434POC 1
SATIN GOLD	K14431SAG 1	K14432SAG 1	K14433SAG 1	K14434SAG 1
PORCELAIN WHITE	K14431WHI 1	K14432WHI 1	K14433WHI 1	K14434WHI 1
LUSTROUS IVORY	K14431LIV 1	K14432LIV 1	K14433LIV 1	K14434LIV 1
LUSTROUS BLACK	K14431LBK 1	K14432LBK 1	K14433LBK 1	K14434LBK 1
POLISHED BRASS	K14431PBR 1	K14432PBR 1	K14433PBR 1	K14434PBR 1
TEXTURED IRON	K14431TIR 1	K14432TIR 1	K14433TIR 1	K14434TIR 1
DESERT BRONZE	K14431DBZ 1	K14432DBZ 1	K14433DBZ 1	K14434DBZ 1
ANTIQUÉ BRASS	K14431ABS 1	K14432ABS 1	K14433ABS 1	K14434ABS 1
TEXTURED COPPER	K14431TCO 1	K14432TCO 1	K14433TCO 1	K14434TCO 1

LEAD TIMES
Please contact our Customer
Services Department on
01268 563 404

MOUNTING BOX
FLUSH
891ALM
DIMENSIONS
86 x 86mm
BS 5733:2010

MOUNTING BOX
FLUSH
891ALM
DIMENSIONS
86 x 86mm
BS 5733:2010

MOUNTING BOX
FLUSH
892ALM
DIMENSIONS
86 x 146mm
BS 5733:2010

MOUNTING BOX
FLUSH
892ALM
DIMENSIONS
86 x 146mm
BS 5733:2010



Technical Hotline
+44 (0)1268 563720

Edge™

WIRING DEVICES
DECORATIVE

Toggle Switch Modules

SP 1 WAY
20 AMP

SP 2 WAY
20 AMP

DP 1 WAY
20 AMP

INTERMEDIATE
20 AMP

Grid Plus Modular Frontplates

SUPPLIED WITH GRIDS

1 MODULE

2 MODULE



SP 1 WAY 20 AMP	SP 2 WAY 20 AMP	DP 1 WAY 20 AMP	INTERMEDIATE 20 AMP	1 MODULE	2 MODULE
K14891BSS 1	K14892BSS 1	K14896BSS 1	K14893BSS 1	K14331BSS 1	K14332BSS 1
K14891LBS 1	K14892LBS 1	K14896LBS 1	K14893LBS 1	K14331LBS 1	K14332LBS 1
K14891BRC 1	K14892BRC 1	K14896BRC 1	K14893BRC 1	K14331BRC 1	K14332BRC 1
K14891POC 1	K14892POC 1	K14896POC 1	K14893POC 1	K14331POC 1	K14332POC 1
K14891SAG 1	K14892SAG 1	K14896SAG 1	K14893SAG 1	K14331SAG 1	K14332SAG 1
K14891WHI 1	K14892WHI 1	K14896WHI 1	K14893WHI 1	K14331WHI 1	K14332WHI 1
K14891LIV 1	K14892LIV 1	K14896LIV 1	K14893LIV 1	K14331LIV 1	K14332LIV 1
K14891LBK 1	K14892LBK 1	K14896LBK 1	K14893LBK 1	K14331LBK 1	K14332LBK 1
K14891PBR 1	K14892PBR 1	K14896PBR 1	K14893PBR 1	K14331PBR 1	K14332PBR 1
K14891TIR 1	K14892TIR 1	K14896TIR 1	K14893TIR 1	K14331TIR 1	K14332TIR 1
K14891DBZ 1	K14892DBZ 1	K14896DBZ 1	K14893DBZ 1	K14331DBZ 1	K14332DBZ 1
K14891ABS 1	K14892ABS 1	K14896ABS 1	K14893ABS 1	K14331ABS 1	K14332ABS 1
K14891TCO 1	K14892TCO 1	K14896TCO 1	K14893TCO 1	K14331TCO 1	K14332TCO 1

BS EN 60699-1:1999

BS EN 60699-1:1999

BS EN 60699-1:1999

BS EN 60699-1:1999

MOUNTING BOX
FLUSH
891ALM
DIMENSIONS
86 x 86mm
BS 5733:2010

MOUNTING BOX
FLUSH
891ALM
DIMENSIONS
86 x 86mm
BS 5733:2010

Grid Plus
Modular Frontplates
SUPPLIED WITH GRIDS


3 MODULE

4 MODULE

6 MODULE

8 MODULE

9 MODULE



FINISHES	3 MODULE		4 MODULE		6 MODULE		8 MODULE		9 MODULE	
BRUSHED STAINLESS STEEL	K14333BSS	1	K14334BSS	1	K14346BSS	1	K14348BSS	1	K14349BSS	1
LACQUERED BRUSHED STEEL	K14333LBS	1	K14334LBS	1	K14346LBS	1	K14348LBS	1	K14349LBS	1
BRUSHED CHROME	K14333BRC	1	K14334BRC	1	K14346BRC	1	K14348BRC	1	K14349BRC	1
POLISHED CHROME	K14333POC	1	K14334POC	1	K14346POC	1	K14348POC	1	K14349POC	1
SATIN GOLD	K14333SAG	1	K14334SAG	1	K14346SAG	1	K14348SAG	1	K14349SAG	1
PORCELAIN WHITE	K14333WHI	1	K14334WHI	1	K14346WHI	1	K14348WHI	1	K14349WHI	1
LUSTROUS IVORY	K14333LIV	1	K14334LIV	1	K14346LIV	1	K14348LIV	1	K14349LIV	1
LUSTROUS BLACK	K14333LBK	1	K14334LBK	1	K14346LBK	1	K14348LBK	1	K14349LBK	1
POLISHED BRASS	K14333PBR	1	K14334PBR	1	K14346PBR	1	K14348PBR	1	K14349PBR	1
TEXTURED IRON	K14333TIR	1	K14334TIR	1	K14346TIR	1	K14348TIR	1	K14349TIR	1
DESERT BRONZE	K14333DBZ	1	K14334DBZ	1	K14346DBZ	1	K14348DBZ	1	K14349DBZ	1
ANTIQUE BRASS	K14333ABS	1	K14334ABS	1	K14346ABS	1	K14348ABS	1	K14349ABS	1
TEXTURED COPPER	K14333TCO	1	K14334TCO	1	K14346TCO	1	K14348TCO	1	K14349TCO	1

LEAD TIMES
Please contact our Customer
Services Department on
01268 563 404

MOUNTING BOX
FLUSH
892ALM
DIMENSIONS
86 x 146mm
BS 5733:2010

MOUNTING BOX
FLUSH
892ALM
DIMENSIONS
86 x 146mm
BS 5733:2010

MOUNTING BOX
FLUSH
893ALM
DIMENSIONS
146 x 146mm
BS 5733:2010

MOUNTING BOX
FLUSH
893ALM
DIMENSIONS
146 x 146mm
BS 5733:2010

MOUNTING BOX
FLUSH
895ALM
DIMENSIONS
206 x 146mm
BS 5733:2010



Technical Hotline
+44 (0)1268 563720

Edge™

WIRING DEVICES
DECORATIVE

Grid Plus Modular Frontplates

SUPPLIED WITH GRIDS

12 MODULE

18 MODULE

24 MODULE

1 MODULE
ARCHITRAVE

Grid Plus Spare Mounting Frames

1 MODULE
MOUNTING
FRAME

2 MODULE
MOUNTING
FRAME



K14352BSS	1	K14358BSS	1	K14354BSS	1	K14401BSS	1		
K14352LBS	1	K14358LBS	1	K14354LBS	1	K14401LBS	1		
K14352BRC	1	K14358BRC	1	K14354BRC	1	K14401BRC	1		
K14352POC	1	K14358POC	1	K14354POC	1	K14401POC	1		
K14352SAG	1	K14358SAG	1	K14354SAG	1	K14401SAG	1		
K14352WHI	1	K14358WHI	1	K14354WHI	1	K14401WHI	1		
K14352LIV	1	K14358LIV	1	K14354LIV	1	K14401LIV	1	K14701	10
K14352LBK	1	K14358LBK	1	K14354LBK	1	K14401LBK	1		
K14352PBR	1	K14358PBR	1	K14354PBR	1	K14401PBR	1		
K14352TIR	1	K14358TIR	1	K14354TIR	1	K14401TIR	1		
K14352DBZ	1	K14358DBZ	1	K14354DBZ	1	K14401DBZ	1		
K14352ABS	1	K14358ABS	1	K14354ABS	1	K14401ABS	1		
K14352TCO	1	K14358TCO	1	K14354TCO	1	K14401TCO	1		

MOUNTING BOX
FLUSH
895ALM
DIMENSIONS
206 x 146mm
BS 5733:2010

MOUNTING BOX
FLUSH
898ALM
DIMENSIONS
206 x 206mm
BS 5733:2010

MOUNTING BOX
FLUSH
900ALM
DIMENSIONS
207 x 267mm
BS 5733:2010

MOUNTING BOX
FLUSH
3891ZIC
DIMENSIONS
38.8 x 91.75
BS 5733:2010

Grid Plus Spare Mounting Frames

Switch Modules

3 MODULE
MOUNTING FRAME

4 MODULE
MOUNTING FRAME

6 MODULE
MOUNTING FRAME

1 MODULE
ARCHITRAVE
MOUNTING FRAME

BLANK INSERT



FINISHES	3 MODULE MOUNTING FRAME		4 MODULE MOUNTING FRAME		6 MODULE MOUNTING FRAME		1 MODULE ARCHITRAVE MOUNTING FRAME		BLANK INSERT	
BRUSHED STAINLESS STEEL									K4880BSS*	1
LACQUERED BRUSHED STEEL									K4880LBS*	1
BRUSHED CHROME									K4880BRC*	1
POLISHED CHROME									K4880POC*	1
SATIN GOLD									K4880SAG*	1
MK WHITE (PLASTIC ROCKER)									K4880WHI	10
LUSTROUS IVORY	K14703	10	K14704	10	K14706	10	K14801	10	K4880LIVW	1
LUSTROUS BLACK									K4880LBKB	1
POLISHED BRASS									K4880PBR*	1
TEXTURED IRON									K4880TIRB	1
DESERT BRONZE									K4880DBZB	1
ANTIQUE BRASS									K4880ABSB	1
TEXTURED COPPER									K4880TCOB	1

LEAD TIMES
Please contact our Customer
Services Department on
01268 563 404

Will only fit MK Mounting Box
3891ZIC

* Available with the option of either White or Black inserts. Add Suffix 'W' or 'B' to part number when ordering, E.g. KxxxxBSSW.

Where there is no asterisk, the final suffix W = White Insert, B = Black Insert, E.g. KxxxxLIVW Lustrous Ivory finish with white inserts

BS 5733:2010



Technical Hotline
+44 (0)1268 563720

Edge™

WIRING DEVICES
DECORATIVE

Switch Modules 10 Amp

SP 1 WAY
10 AMP

DP 1 WAY
10 AMP

SP 2 WAY
10 AMP

SP 2 WAY
RETRACTIVE
10 AMP

SP 2 WAY
RED
RETRACTIVE
10 AMP

SP 2 WAY
RETRACTIVE
MARKED BELL
SYMBOL
10 AMP



K4881BSS*	1	K4981BSS*	1	K4882BSS*	1	K4885BSS*	1			
K4881LBS*	1	K4981LBS*	1	K4882LBS*	1	K4885LBS*	1			
K4881BRC*	1	K4981BRC*	1	K4882BRC*	1	K4885BRC*	1			
K4881POC*	1	K4981POC*	1	K4882POC*	1	K4885POC*	1			
K4881SAG*	1	K4981SAG*	1	K4882SAG*	1	K4885SAG*	1			
K4881WHI	10	K4981WHI	10	K4882WHI	10	K4885WHI	10			
K4881LIVW	1	K4981LIVW	1	K4882LIVW	1	K4885LIVW	1	K4885RED K4885REDB	1 1	
K4881LBKB	1	K4981LBKB	1	K4882LBKB	1	K4885LBKB	1		K4885BWHI K4885BBLK	1 1
K4881PBR*	1	K4981PBR*	1	K4882PBR*	1	K4885PBR*	1			
K4881TIRB	1	K4981TIRB	1	K4882TIRB	1	K4885TIRB	1			
K4881DBZB	1	K4981DBZB	1	K4882DBZB	1	K4885DBZB	1			
K4881ABSB	1	K4981ABSB	1	K4882ABSB	1	K4885ABSB	1			
K4881TCOB	1	K4981TCOB	1	K4882TCOB	1	K4885TCOB	1			

* Available with the option of either White or Black inserts. Add Suffix 'W' or 'B' to part number when ordering, E.g. KxxxxBSSW.

Where there is no asterix, the final suffix W = White Insert, B = Black Insert, E.g. KxxxxLIVW Lustrous Ivory finish with white inserts

BS EN 60669-1:1999

BS EN 60669-1:1999

BS EN 60669-1:1999

NOTE
Push switches are not designed for fluorescent loads.
BS EN 60669-1:1999

NOTE
Push switches are not designed for fluorescent loads.
BS EN 60669-1:1999

NOTE
Push switches are not designed for fluorescent loads.
BS EN 60669-1:1999

Switch Modules 10 Amp

SP 2 WAY
RETRACTIVE
MARKED 'PRESS'
10 AMP






2 WAY
CENTRE OFF
RETRACTIVE
10 AMP

Switch Modules 20 Amp

SP 1 WAY
20 AMP

DP
1 WAY
PUSH TO MAKE
20 AMP

DP
1 WAY
RED ROCKER
PUSH TO MAKE
20 AMP

FINISHES					
BRUSHED STAINLESS STEEL	K4885PWHI K4885PBLK	K4900BSS* 1	K4891BSS* 1	K4910BSS* 1	K4910RED K4910REDB
LACQUERED BRUSHED STEEL		K4900LBS* 1	K4891LBS* 1	K4910LBS* 1	
BRUSHED CHROME		K4900BRC* 1	K4891BRC* 1	K4910BRC* 1	
POLISHED CHROME		K4900POC* 1	K4891POC* 1	K4910POC* 1	
SATIN GOLD		K4900SAG* 1	K4891SAG* 1	K4910SAG* 1	
MK WHITE (PLASTIC ROCKER)		K4900WHI 10	K4891WHI 10	K4910WHI 10	
LUSTROUS IVORY		K4900LIVW 1	K4891LIVW 1	K4910LIVW 1	
LUSTROUS BLACK		K4900LBKB 1	K4891LBKB 1	K4910LBKB 1	
POLISHED BRASS		K4900PBR* 1	K4891PBR* 1	K4910PBR* 1	
TEXTURED IRON		K4900TIRB 1	K4891TIRB 1	K4910TIRB 1	
DESERT BRONZE		K4900DBZB 1	K4891DBZB 1	K4910DBZB 1	
ANTIQU BRASS		K4900ABSB 1	K4891ABSB 1	K4910ABSB 1	
TEXTURED COPPER		K4900TCOB 1	K4891TCOB 1	K4910TCOB 1	

LEAD TIMES
Please contact our Customer
Services Department on
01268 563 404

* Available with the option of either White or Black inserts. Add Suffix 'W' or 'B' to part number when ordering, E.g. KxxxxBSSW.
Where there is no asterix, the final suffix W = White Insert, B = Black Insert, E.g. KxxxxLIVW Lustrous Ivory finish with white inserts

NOTE
Push switches are not designed
for fluorescent loads.
BS EN 60669-1:1999

NOTE
Push switches are not designed
for fluorescent loads.
BS EN 60669-1:1999

BS EN 60669-1:1999

NOTE
Push switches are not designed
for fluorescent loads.
BS EN 60669-1:1999

NOTE
Push switches are not designed
for fluorescent loads.
BS EN 60669-1:1999

Switch Modules






SP 2 WAY
AND CENTRE
OFF, RED ROCKER
20 AMP

INTERMEDIATE
20 AMP

INTERMEDIATE
RED ROCKER
20 AMP

DP
1 WAY
20 AMP

DP
1 WAY
WITH NEON
20 AMP

FINISHES					
BRUSHED STAINLESS STEEL	K4899RED 10 K4899REDB 10	K4893BSS* 1	K4893RED 10 K4893REDB 10	K4896BSS* 1	K4896NWHI 1 K4896NBLK 1
LACQUERED BRUSHED STEEL		K4893LBS* 1		K4896LBS* 1	
BRUSHED CHROME		K4893BRC* 1		K4896BRC* 1	
POLISHED CHROME		K4893POC* 1		K4896POC* 1	
SATIN GOLD		K4893SAG* 1		K4896SAG* 1	
MK WHITE (PLASTIC ROCKER)		K4893WHI 1		K4896WHI 1	
LUSTROUS IVORY		K4893LIVW 1		K4896LIVW 1	
LUSTROUS BLACK		K4893LBKB 1		K4896LBKB 1	
POLISHED BRASS		K4893PBR* 1		K4896PBR* 1	
TEXTURED IRON		K4893TIRB 1		K4896TIRB 1	
DESERT BRONZE		K4893DBZB 1		K4896DBZB 1	
ANTIQUE BRASS		K4893ABSB 1		K4896ABSB 1	
TEXTURED COPPER		K4893TCOB 1		K4896TCOB 1	

LEAD TIMES
Please contact our Customer
Services Department on
01268 563 404

BS EN 60669-1:1999

BS EN 60669-1:1999

BS EN 60669-1:1999

BS EN 60669-1:1999

BS EN 60669-1:1999

* Available with the option of either White or Black inserts. Add Suffix 'W' or 'B' to part number when ordering, E.g. KxxxxBSSW.
Where there is no asterisk, the final suffix W = White Insert, B = Black Insert, E.g. KxxxxLIVW
Lustrous Ivory finish with white inserts



Technical Hotline
+44 (0)1268 563720

Edge™

Switch Modules

- DP
 - 1 WAY
 - WITH WINDOW
 - 20 AMP
- DP
 - 1 WAY
 - RED ROCKER
 - 20 AMP



Printed Modules with and without Neon



K4896WWHI 10
K4896WBLK 10

K4896RED 10
K4896REDB 10

K4896 PRINTED MODULE

FOR WHITE ROCKERS, USE THE SUFFIX 'WHI'. FOR BLACK ROCKERS, USE THE SUFFIX 'BLK'. FOR EXAMPLE: K4896BRWHI OR K4896BRBLK

BOILER K4896BR	WASTE DISPOSAL K4896WD	HOB K4896HB
DISHWASHER K4896DW	WASHING MACHINE K4896WM	IMMERSION HEATER K4896IH
COOKER HOOD K4896CH	TUMBLE DRYER K4896TD	PLINTH HEATER K4896PH
FAN K4896FN	WASHER DRYER K4896WDR	WORKTOP LIGHTING K4896WL
FRIDGE K4896Fg	MICROWAVE K4896MW	WINE COOLER K4896WC
FREEZER K4896FZ	HEATER K4896HR	WARMING DRAWER K4896WDA
FRIDGE FREEZER K4896FF	OVEN K4896OV	COFFEE MACHINE K4896CM

K4896N PRINTED MODULE WITH NEON

FOR WHITE ROCKERS, USE THE SUFFIX 'WHI'. FOR BLACK ROCKERS, USE THE SUFFIX 'BLK'. FOR EXAMPLE: K4896NBRWHI OR K4896NBRBLK

BOILER K4896NBR	WASTE DISPOSAL K4896NWD	HOB K4896NHB
DISHWASHER K4896NDW	WASHING MACHINE K4896NWM	IMMERSION HEATER K4896NIH
COOKER HOOD K4896NCH	TUMBLE DRYER K4896NTD	PLINTH HEATER K4896NPH
FAN K4896NFN	WASHER DRYER K4896NWDR	WORKTOP LIGHTING K4896NWL
FRIDGE K4896NFg	MICROWAVE K4896NMW	WINE COOLER K4896NWC
FREEZER K4896NFZ	HEATER K4896NHR	WARMING DRAWER K4896NWDA
FRIDGE FREEZER K4896NFF	OVEN K4896NOV	COFFEE MACHINE K4896NCM

NOTE

K4896NIH (Immersion Heater with Neon) is not available with black rockers.

BS EN 60669-1:1999

BS EN 60669-1:1999

Key Switch Modules

INTERMEDIATE
KEY SWITCH
20 AMP

SP
KEY SWITCH
2 WAY
20 AMP

SP KEY SWITCH
2 WAY
EMERGENCY
LIGHTING
20 AMP

DP
KEY SWITCH
1 WAY
20 AMP

DP
EMERGENCY
LIGHTING
20 AMP

SP
KEY SWITCH
2 WAY
RETRACTIVE
20 AMP



FINISHES

WHITE	K4894WHI 10	K4898WHI 10	K4898ELWHI 10	K4917WHI 10	K4917ELWHI 10	K4918WHI 10
BLACK	K4894BLK 1	K4898BLK 1	K4898ELBLK 1	K4917BLK 1		K4918BLK 10

LEAD TIMES
Please contact our Customer Services Department on 01268 563 404

BS EN 60669-1:1999
Key (3405ZIC) is supplied.

BS EN 60669-1:1999
Key (3405ZIC) is supplied.

BS EN 60669-1:1999
Key (3405ZIC) is supplied.

BS EN 60669-1:1999
Key (3405ZIC) is supplied.

BS EN 60669-1:1999
Key (3405ZIC) is supplied.

BS EN 60669-1:1999
Key (3405ZIC) is supplied.



Technical Hotline
+44 (0)1268 563720

Edge™

WIRING DEVICES
DECORATIVE

Indicator Modules

200-250V
NEON



200-250V
NEON



200-250V
FLUORESCENT



21-36V
FILAMENT



21-36V
FILAMENT



21-36V
FILAMENT



K4889RED 10
K4889REDB 1

K4889AMB 10

K4889GRN 10

K4836RED 10

K4836AMB 10

K4836GRN 10

BS 5733:2010

BS 5733:2010

BS 5733:2010

BS 5733:2010

BS 5733:2010

BS 5733:2010

Will Operate On Both A.C. And D.C

Not available in other finishes

Dimmer Switch Modules

1 GANG 40W/
VA-220W/180VA,
230VA.C, 50HZ
2 WAY
1 MODULE

1 GANG 60W/
VA-400W/320VA,
230VA.C, 50HZ
2 WAY
2 MODULE

1 GANG
40-220W/180VA/
4-70W LED DIMMER
2 WAY
1 MODULE

0-10V/1-10V
FLUORESCENT
CONTROLLER
1 MODULE



FINISHES								
BRUSHED STAINLESS STEEL	K4501BSS*LV	1	K4500BSS*LV	1	K4511BSS*LV	1	K4499BSS*	1
LACQUERED BRUSHED STEEL	K4501LBS*LV	1	K4500LBS*LV	1	K4511LBS*LV	1	K4499LBS*	1
BRUSHED CHROME	K4501BRC*LV	1	K4500BRC*LV	1	K4511BRC*LV	1	K4499BRC*	1
POLISHED CHROME	K4501POC*LV	1	K4500POC*LV	1	K4511POC*LV	1	K4499POC*	1
SATIN GOLD	K4501SAG*LV	1	K4500SAG*LV	1	K4511SAG*LV	1	K4499SAG*	1
PORCELAIN WHITE	K4501WHIWL	1	K4500WHIWL	1	K4511WHIWL	1	K4499WHI	1
LUSTROUS IVORY	K4501LIVWL	1	K4500LIVWL	1	K4511LIVWL	1	K4499LIVW	1
LUSTROUS BLACK	K4501LBKBL	1	K4500LBKBL	1	K4511LBKBL	1	K4499LBKB	1
POLISHED BRASS	K4501PBR*LV	1	K4500PBR*LV	1	K4511PBR*LV	1	K4499PBR*	1
TEXTURED IRON	K4501TIRBL	1	K4500TIRBL	1	K4511TIRBL	1	K4499TIRB	1
DESERT BRONZE	K4501DBZBL	1	K4500DBZBL	1	K4511DBZBL	1	K4499DBZB	1
ANTIQU BRASS	K4501ABSBL	1	K4500ABSBL	1	K4511ABSBL	1	K4499ABS	1
TEXTURED COPPER	K4501TCOBL	1	K4500TCOBL	1	K4511TCOBL	1	K4499TCOB	1

LEAD TIMES
Please contact our Customer
Services Department on
01268 563 404

These dimmers incorporate the latest in micro-controller based circuitry to provide electronic soft-start and overload protection. Suitable for use with good quality electronic or wire wound transformers. Can also be used with good quality mains voltage halogen lamps incorporating GU10 bases. Please check with lamp manufacturer to determine suitability. K4500 is only suitable for use in 2, 4 and 8 module grids. They are not suitable for fluorescent lamps.

MK Fluorescent Grid Dimmers are low voltage controllers for connection to 1-10V controllable ballasts.

NOTE
Refer to technical section for derating factors when more than one unit is used in any one box.
Conforms to the latest standard BS EN 60669-2-1.






* Available with the option of either White or Black inserts. Add Suffix 'W' or 'B' to part number when ordering, E.g. KxxxxBSSW. Where there is no asterisk, the final suffix W = White Insert, B = Black Insert, E.g. KxxxxWHIW = Porcelain White finish with White inserts

When ordering K4500, K4501 & K4511, use the suffix 'LV' right at the end, eg. K4501BSSWL



Technical Hotline
+44 (0)1268 563720

Accessory Modules

SINGLE TV CO-AXIAL OUTLET NON-ISOLATED	SINGLE TV CO-AXIAL OUTLET ISOLATED	BUZZER UNIT 200-250V	BUZZER UNIT 21-36V	CORD OUTLET 16 AMP
				
K4520WHI 10 K4896WBLK 10	K4521WHI 10 K4521BLK 10	K4000WHI 10	K4001WHI 10	K4886WHI 10 K4886BLK 10

For direct connection to TV or FM aerial co-axial download. NOT to be used in same enclosure as mains exceeding 50V.
BS 3041:1977
IEC 169-2:1965
BS 5733:2010 where applicable.

For direct connection to TV or FM aerial co-axial download. NOT to be used in same enclosure as mains exceeding 50V.
BS 3041:1977
IEC 169-2:1965
BS 5733:2010 where applicable.

200-250V
BS 5733:2010

Sound output level
Av 61 db @ 15 feet.
BS 5733:2010

Complete with 3 pairs of terminals. The supply terminals are suitable for up to 2 x 2.5mm² or 1 x 4mm² solid conductors. The load terminals are suitable for one 1.5mm² flexible cord. A cord grip is also fitted.
BS 5733:2010

Accessory Modules

FUSE UNIT
13 AMP



FUSE UNIT WITH
TAMPERPROOF
SCREW
13 AMP



Euro Modular Frontplates

EURO
1 MODULE
25 X 50MM



EURO
2 MODULE
50 X 50MM



EURO
4 MODULE
100 X 50MM



FINISHES								
BRUSHED STAINLESS STEEL			K14181BSS	1	K14182BSS	1	K14184BSS	1
LACQUERED BRUSHED STEEL			K14181LBS	1	K14182LBS	1	K14184LBS	1
BRUSHED CHROME			K14181BRC	1	K14182BRC	1	K14184BRC	1
POLISHED CHROME			K14181POC	1	K14182POC	1	K14184POC	1
SATIN GOLD			K14181SAG	1	K14182SAG	1	K14184SAG	1
PORCELAIN WHITE	K4890WHI	10	K14181WHI	1	K14182WHI	1	K14184WHI	1
LUSTROUS IVORY	K4890BLK	10	K14181LIV	1	K14182LIV	1	K14184LIV	1
LUSTROUS BLACK			K14181LBK	1	K14182LBK	1	K14184LBK	1
POLISHED BRASS			K14181PBR	1	K14182PBR	1	K14184PBR	1
TEXTURED IRON			K14181TIR	1	K14182TIR	1	K14184TIR	1
DESERT BRONZE			K14181DBZ	1	K14182DBZ	1	K14184DBZ	1
ANTIQUÉ BRASS			K14181ABS	1	K14182ABS	1	K14184ABS	1
TEXTURED COPPER			K14181TCO	1	K14182TCO	1	K14184TCO	1

LEAD TIMES
Please contact our Customer
Services Department on
01268 563 404

Fuse carrier comes with 13A
cartridge fuse link to BS 1362.
BS 5733:2010

Key 3405ZIC supplied
Fuse carrier comes with 13A
cartridge fuse link to BS 1362.
BS 5733:2010

MOUNTING BOXES
Suitable for flush boxes to
BS 4662:2006 and surface boxes
to BS 5733:2010
Refer to appropriate module for
minimum box depth.
FIXING CENTRES
60.3mm
BS 5733:2010 where applicable.
Note: No grid required, modules
just clip into place.

MOUNTING BOXES
Suitable for flush boxes to
BS 4662:2006 and surface boxes
to BS 5733:2010
Refer to appropriate module for
minimum box depth.
FIXING CENTRES
60.3mm
BS 5733:2010 where applicable.
Note: No grid required, modules
just clip into place.

MOUNTING BOXES
Suitable for flush boxes to
BS 4662:2006 and surface boxes
to BS 5733:2010
Refer to appropriate module for
minimum box depth.
FIXING CENTRES
120.6mm
BS 5733:2010 where applicable.
Note: No grid required, modules
just clip into place.




Technical Hotline
+44 (0)1268 563720

Edge™

WIRING DEVICES
DECORATIVE

Euro Power Modules

UK 250V 2 MODULE 50 X 50MM 13 AMP	GERMAN 2P+E 250V SHUTTERED 2 MODULE (NON UK) 16 AMP	AMERICAN 127V SHUTTERED 2 MODULE 50 X 50MM (NON UK) 15 AMP	UK 250V SHUTTERED 2 MODULE 50 X 50MM 5 AMP	FRENCH/BELGIAN 2P+E 250V SHUTTERED 2 MODULE 50 X 50MM (NON UK) 16 AMP
---	---	--	--	--



K5830WHI 10
K5830BLK 10

K5831WHI 10
K5831BLK 10

K5832WHI 10
K5832BLK 10

K5833WHI 10
K5833BLK 10

K5834WHI 10
K5834BLK 10

MOUNTING BOX
35mm minimum
46mm (for extra wiring space).
DIMENSIONS
50 x 50mm
BS 1363 Part 2:1995

MOUNTING BOX
46mm
DIMENSIONS
50 x 50mm
IEC 60884-1:2006

MOUNTING BOX
35mm
46mm (for extra wiring space)
DIMENSIONS
50 x 50mm
SASO 2204:2003

MOUNTING BOX
35mm minimum
46mm (for extra wiring space).
DIMENSIONS
50 x 50mm
BS 546:1950

MOUNTING BOX
46mm
DIMENSIONS
50 x 50mm
NF C61-314

Mains operated products and extra low voltage modules must not be installed within the same frontplate.
Refer to BS 7671:2008 for details.

Euro Power Modules

USB CHARGING
2 MODULE
50 X 50MM

Euro Datacom Modules

RJ11/12
1 MODULE
25 X 50MM

RJ45
CAT 6
1 MODULE
25 X 50MM

RJ45
CAT 6
SCREENED
1 MODULE
25 X 50MM

RJ45
CAT 6
ANGLED
1 MODULE
25 X 50MM

FINISHES

WHITE	K5837WHI	1	K5887WHI	5	K5846WHI	5	K5846SWHI	5	K5864WHI	5
BLACK	K5837BLK	1	K5887BLK	5	K5846BLK	5	K5846SBLK	5		

LEAD TIMES
Please contact our Customer Services Department on **01268 563 404**

USB charging sockets, each capable of supporting 2A charge (total of 2A)

K5837 MOUNTING BOX
Minimum Box depth 35mm
46mm for extra wiring space
IEC 60950-1
IEC 61000-6-1/3

Suitable for both RJ11 and RJ12 jacks
RJ11; 4 wire
RJ12; 6 wire
MOUNTING BOXES
Minimum Box depth 35mm
FCC68
EN 41003

Cat 6 performance.
Suitable for both 568A and 568B wiring schemes.
MOUNTING BOXES
Minimum Box Depth 35mm
ISO/IEC 11801
EN 50173
TIA 568
EN 41003

Cat 6 performance.
Suitable for both 568A and 568B wiring schemes.
MOUNTING BOXES
Minimum Box Depth 35mm
ISO/IEC 11801
EN 50173
TIA 568
EN 41003

Cat 6 performance.
Suitable for both 568A and 568B wiring schemes.
MOUNTING BOXES
Minimum Box Depth 35mm
ISO/IEC 11801
EN 50173
TIA 568
EN 41003

Mains operated products and extra low voltage modules must not be installed within the same frontplate.
Refer to BS 7671:2008 for details.



Technical Hotline
+44 (0)1268 563720

Edge™

WIRING DEVICES
DECORATIVE

RJ45
CAT 5e
ANGLED
1 MODULE
25 X 50MM

RJ45
CAT 5e
1 MODULE
25 X 50MM

TELEPHONE
MASTER
1 MODULE
25 X 50MM

TELEPHONE
SECONDARY
1 MODULE
25 X 50MM

BNC 50Ω
1 MODULE
25 X 50MM



K5844WHI	5	K5845WHI	5	K5820WHI	5	K5821WHI	5	K5801WHI	5
		K5845BLK	5	K5820BLK	5	K5821BLK	5		

Enhanced Cat 5 performance.
Suitable for both 568A and 568B
wiring schemes.

MOUNTING BOXES
Minimum box depth
35mm standard
ISO/IEC 11801
EN 50173
TIA 568
EN 41003

Enhanced Cat 5 performance.
Suitable for both 568A and 568B
wiring schemes.

MOUNTING BOXES
Minimum box depth 35mm
standard
ISO/IEC 11801
EN 50173
TIA 568
EN 41003

MOUNTING BOXES
Minimum depth 35mm
BS 6312-2

MOUNTING BOXES
Minimum depth 35mm
BS 6312-2

50 Ohm crimp connector suitable
for use with RG58, URM43,
URM76 and Beldon 9907 type
co-axial cables.

MOUNTING BOXES
Minimum box depth 35mm

Mains operated products and extra low voltage modules must not be installed within the same frontplate.
Refer to BS 7671:2008 for details.





Euro Multimedia Modules

SINGLE OUTLET
(IEC MALE)
1 MODULE
25 X 50MM

SINGLE OUTLET
(IEC FEMALE)
1 MODULE
25 X 50MM

SINGLE F-TYPE
SATELLITE
SOCKET
1 MODULE
25 X 50MM

TWIN OUTLET
TV/FM DIPLEXER
2 MODULE
50 X 50MM
(IRELAND ONLY)

FINISHES								
WHITE	K5850WHI	5	K5851WHI	5	K5855WHI	5	K5852WHI	5
BLACK	K5850BLK	5	K5851BLK	5	K5855BLK	5	K5852BLK	5

LEAD TIMES

Please contact our Customer Services Department on **01268 563 404**

Fully screened non isolated TV outlets containing a combination of single, TV/FM Diplexer, TV/FM/SAT Triplexer and BT secondary telephone outlets for use within digital TV systems and interactive TV services.
Single outlets for connection to a single TV, FM or Satellite co-axial aerial lead.

MOUNTING BOXES

Minimum Box Depth 47mm
BS 3041:1997, IEC 169-2:1965, BS EN 50083 & BS 5733:2010 where applicable.

TV/FM Diplexer units for connection to a single co-axial aerial lead with combined TV and FM signals.

PERFORMANCE

Single	TV:	DC - 950MHz
	Sat:	DC - 1.75GHz
Diplexer	TV:	5-65MHz
		470-862MHz
	FM:	87.5-108 MHz

TV/FM/DAB FOR DIGITAL RADIO

PERFORMANCE

Diplexer	TV:	5-65MHz
		470-862MHz
	FM/DAB:	87.5-230MHz

These products are fully compatible with Labgear TV distribution systems and are approved for use in "Sky Homes" and "Homes On" specifications.

Mains operated products and extra low voltage modules must not be installed within the same frontplate.
Refer to BS 7671:2008 for details.

Euro Multimedia Modules

TWIN OUTLET
TV-FM/DAB
DIPLEXER
2 MODULE
50 X 50MM

TRIPLE OUTLET
TV/FM/SATELLITE
TRIPLEXER
2 MODULE
50 X 50MM
(IRELAND ONLY)

TRIPLE OUTLET
TV-FM/DAB-SAT
TRIPLEXER
2 MODULE
50 X 50MM

QUAD OUTLET
TV-FM/DAB-2XSAT
2 MODULE
50 X 50MM

FEMALE HDMI OUTLET
2 MODULE
50 X 50MM



K5852DABWHI	5	K5853WHI	5	K5853DABWHI	5	K5854DABWHI	5	K5807WHI	5
K5852DABBLK	5	K5853BLK	5	K5853DABBLK	5	K5854DABBLK	5	K5807BLK	5

TV/FM Diplexer units for connection to a single co-axial aerial lead with combined TV and FM signals.

PERFORMANCE

Single	TV:	DC - 950MHz
1.75GHz	Sat:	DC -
Diplexer	TV:	5-65MHz 470-862MHz
862MHz	FM:	87.5-108MHz
MHz		
TV/FM/DAB FOR DIGITAL RADIO		
PERFORMANCE		
Diplexer	TV:	5-65MHz 470-862MHz
862MHz	FM/DAB:	87.5-230MHz
230MHz		

TV/FM diplexer units for connection to a single co-axial aerial lead with combined TV and FM signals.
TV/FM/SAT triplexer units for connection to a single co-axial aerial lead with combined TV, FM and Satellite signals

PERFORMANCE

SINGLE OUTLETS

TV/FM IEC MALE OR FEMALE DC-950MHz

SAT F-TYPE DC-1.75GHz

TV/FM/SAT PRODUCTS

OUTLET	DIPLEXER	OUTLET	TRIPLEXER
TV	5-65MHz	TV	5-65MHz
FM/DAB	470-862MHz	FM	470-862MHz
SAT	87.5-108MHz	SAT1	87.5-108MHz
	N/A	SAT2	950-2300MHz
TV/FM/DAB/SAT PRODUCTS FOR DIGITAL RADIO			
OUTLET	DIPLEXER	OUTLET	TRIPLEXER
TV	5-65MHz	TV	5-65MHz
FM/DAB	470-862MHz	FM	470-862MHz
SAT OR SAT1	87.5-230MHz	SAT1	87.5-230MHz
SAT2	N/A	SAT2	950-2300MHz

K5807 Female HDMI Outlet is HDMI 1.1, 1.2, 1.3 and 1.4b compatible, HDCP compliant.

DATA RATE

Up to 2.25 Gbps

SCAN

Up to 1080p/1920x1200

INPUT CONNECTOR

1 x HDMI Female (Type A)

OUTPUT CONNECTOR

1 x HDMI Female (Type A)

Supports high resolution input:

PC: VGA, SVGA,

SXVGA (1280x1024) and UXGA (1600x1200, 1920x1200)

HDTV: 480p, 720p, 1080i and 1080p

HDMI input cable should be no larger than 20m

These products are fully compatible with Labgear TV distribution systems and are approved for use in "Sky Homes" and "Homes On" specifications.

Mains operated products and extra low voltage modules must not be installed within the same frontplate. Refer to BS 7671:2008 for details.

Euro Blank Modules

AUDIO BINDING
POST FOR SINGLE
LOUD SPEAKER
1 MODULE
25 X 50MM

RCA TO SCREW
TERMINATION SET
1 RED AND 1 BLACK
1 MODULE
25 X 50MM

2 MODULE
50 X 50MM

1 MODULE
25 X 50MM

1/2 MODULE
12.5 X 50MM



FINISHES

- BRUSHED STAINLESS STEEL
- LACQUERED BRUSHED STEEL
- BRUSHED CHROME
- POLISHED CHROME
- SATIN GOLD
- PORCELAIN WHITE
- LUSTROUS IVORY
- LUSTROUS BLACK
- POLISHED BRASS
- TEXTURED IRON
- DESERT BRONZE
- ANTIQUÉ BRASS
- TEXTURED COPPER

K5805WHI
K5805BLK

5
5

K5806WHI
K5806BLK

5
5

K180WHI
K180BLK

10
10

K188WHI
K188BLK

10
10

K186WHI
K186BLK

10
10

LEAD TIMES
Please contact our Customer
Services Department on
01268 563 404

DIMENSIONS
50 x 25 x 28mm

DIMENSIONS
50 x 25 x 28mm

BS 5733:2010 where applicable

BS 5733:2010 where applicable

BS 5733:2010 where applicable



Technical Hotline
+44 (0)1268 563720

Edge™

WIRING DEVICES
DECORATIVE

LJU6C Datacom Frontplate

1 GANG
2 MODULE
22 X 37MM



LJU6C Datacom Modules

RJ11/12
1 MODULE



RJ45 CAT 6
1 MODULE



RJ45
CAT 6
SCREENED
1 MODULE



RJ45
CAT 5e
1 MODULE



K14172BSS*	1						
K14172LBS*	1						
K14172BRC*	1						
K14172POC*	1						
K14172SAG*	1						
K14172WHIW	1						
K14172LIVW	1	K5787WHI	5	K5746WHI	5		
K14172LBK	1			K5746BLK	5		
K14172PBRB	1						
K14172TIRB	1						
K14172DBZB	1						
K14172ABSB	1						
K14172TCOB	1						
						K5746SWHI	5
						K5746SBLK	5
						K5745WHI	5
						K5745BLK	5

MOUNTING BOXES

Suitable for flush boxes to BS 4662:1970 and surface boxes to BS 5733:2010

Refer to appropriate module for minimum box depth.

FIXING CENTRES

1 gang: 60.3mm

2 gang: 120.6mm

BS 5733:2010 where applicable

NOTE

No grid required, modules just clip into place

Suitable for both RJ11 and RJ12 jacks.

RJ11: 4 wire

RJ12: 6 wire

MOUNTING BOXES

Minimum box depth 35mm

FCC68

EN41003

Cat 6 performance.

Suitable for both 568A and 568B wiring schemes.

MOUNTING BOXES

Minimum Box Depth 35mm

ISO/IEC 11801

EN 50173

TIA 568

EN 41003

Cat 6 performance.

Suitable for both 568A and 568B wiring schemes.

MOUNTING BOXES

Minimum Box Depth 35mm

ISO/IEC 11801

EN 50173

TIA 568

EN 41003

Enhanced Cat 5 performance.

Suitable for both 568A and 568B wiring schemes.

MOUNTING BOXES

Minimum Box Depth 25mm

ISO/IEC 11801

EN 50173

TIA 568

EN 41003

* Available with White or Black inserts.

**LJU6C Datacom
Blanks**

 LJU6C
1 MODULE

Blank Plates

1 GANG

2 GANG

FINISHES			
BRUSHED STAINLESS STEEL	K170WHI K170BLK	10 10	K14330BSS 1 K14329BSS 1
LACQUERED BRUSHED STEEL			K14330LBS 1 K14329LBS 1
BRUSHED CHROME			K14330BRC 1 K14329BRC 1
POLISHED CHROME			K14330POC 1 K14329POC 1
SATIN GOLD			K14330SAG 1 K14329SAG 1
PORCELAIN WHITE			K14330WHI 1 K14329WHI 1
LUSTROUS IVORY			K14330LIV 1 K14329LIV 1
LUSTROUS BLACK			K14330LBK 1 K14329LBK 1
POLISHED BRASS			K14330PBR 1 K14329PBR 1
TEXTURED IRON			K14330TIR 1 K14329TIR 1
DESERT BRONZE			K14330DBZ 1 K14329DBZ 1
ANTIQUÉ BRASS			K14330ABS 1 K14329ABS 1
TEXTURED COPPER			K14330TCO 1 K14329TCO 1

LEAD TIMES
Please contact our Customer
Services Department on
01268 563 404

BS 5733:2010 where appropriate

MOUNTING BOXES
FLUSH
866ZIC
DIMENSIONS:
86 x 86mm
FIXING CENTRES
1 gang: 60.3mm
BS 5733:2010

MOUNTING BOXES
FLUSH
866ZIC
DIMENSIONS:
86 x 146mm
FIXING CENTRES
2 gang: 120.6mm
BS 5733:2010
